

BERKELEY® DMC Series Multi-Stage Centrifugal Pump



The DMC Multi-Stage Centrifugal Pump offers heads to 175 feet and capacities to 50 GPM. Designed for the professional with heavy-duty cast iron pump case and seal plates and diffuser with Noryl® impellers for years of proven service. Available in 2 HP model.

APPLICATIONS

- Residential Lawn Sprinkling
- Turf Irrigation
- Heat Pumps
- Water Transfer

ORDERING INFORMATION

| Catalog Number | HP | Suction | Pump/Motor Unit | | Shallow Well Adapter | |
|--------------------------|----|---------|------------------|---------|----------------------|------------------|
| | | | Discharge | Length | Approx. Wt. Lbs. | Approx. Wt. Lbs. |
| SINGLE PHASE - 115/230V* | | | | | | |
| BDMC-2-200 | 2* | 1-1/4" | 1" | 20-7/8" | 63 | 3 |
| DMC SWITCH KIT - SK75 | | | | | | |
| Catalog Number | | | Approx. Wt. Lbs. | | | |
| 66632 | | | 2 | | | |

*2 HP available 230V only.

SPECIFICATIONS

Pump Case - Cast iron

Diffuser - Reinforced polypropylene

Impeller - Noryl®

Mechanical Shaft Seal, Type 6 - Buna-N, Carbon, Ceramic, 18-8 stainless steel

Mounting Base - Steel

FEATURES

Rugged Construction - Heavy-duty cast iron pump case and seal-plate
Drain Port - Provided for easy winterization


Easy Serviceability - Normal wearing parts are easily accessible for service and replacement, without disturbing piping

Heavy-Duty Motors - Designed for continuous operation.

Noryl® is a registered trademark of General Electric Co.
 All other brand or product names are trademarks or registered marks of Pentair Ltd.

BERKELEY® DMC Series Multi-Stage Centrifugal Pump

PUMP PERFORMANCE

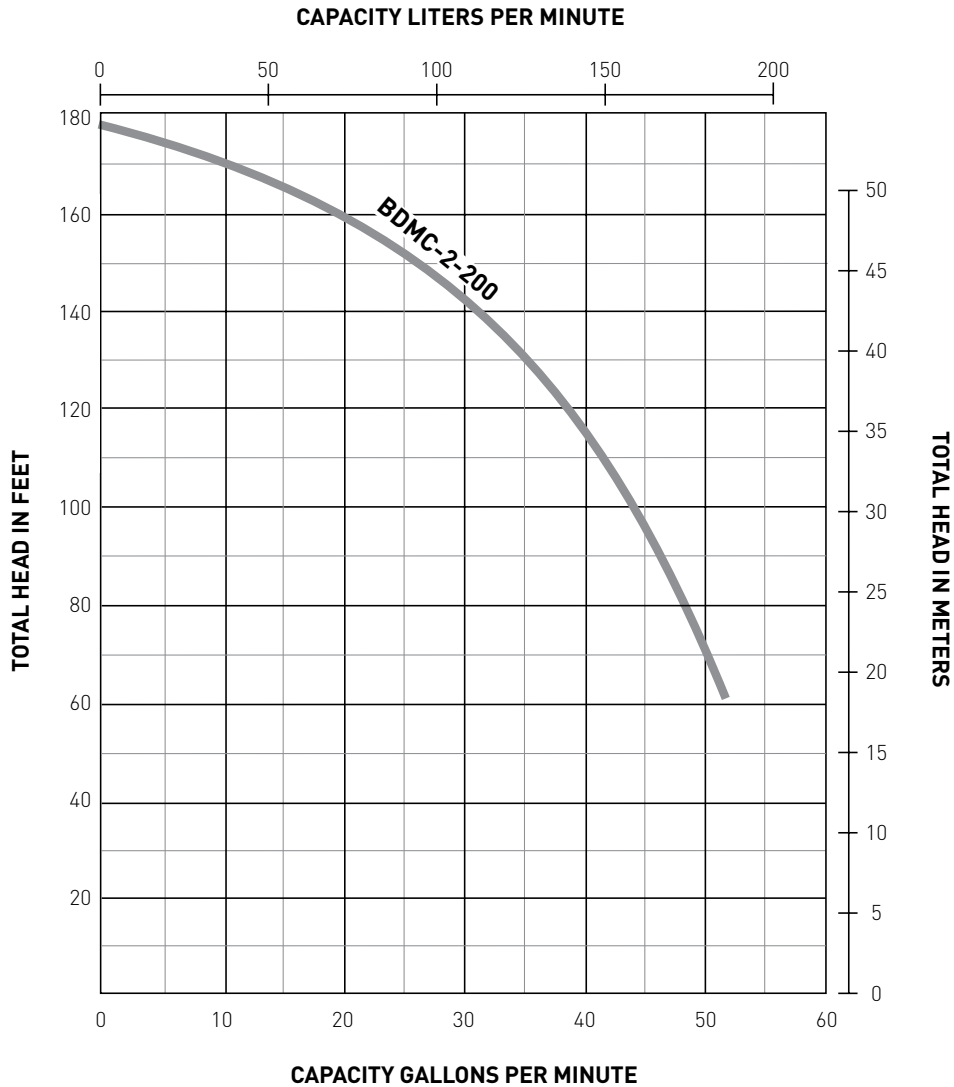

| Catalog Number | HP | Discharge Pressure PSI | Depth to Water in Feet | | | | |
|----------------|----|------------------------|------------------------|-----|-----|-----|-----|
| | | | 5' | 10' | 15' | 20' | 25' |
| BDMC-2-200 | 2 | 30 | 49 | 48 | 47 | 46 | 45 |
| | | 40 | 44 | 43 | 42 | 40 | 39 |
| | | 50 | 38 | 36 | 35 | 33 | 31 |
| | | 60 | 30 | 27 | 24 | 21 | 15 |

Pumping capacities in gallons per minute at indicated discharge pressures in pounds per square inch.

